

# Eazy Electric Convection Oven 6GN 1/1 with Cleaning System

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**240008 (ZCD061WL)**

Compact Eazy, electric, 6x1/1GN, convection oven with direct steam and 11 humidity level settings, with automatic cleaning, right-hinged door

**240010 (ZCD061WD)**

Compact Eazy, electric, 6x1/1GN, convection oven with direct steam and 11 humidity level settings, with automatic cleaning

## Short Form Specification

**Item No.** \_\_\_\_\_

Convection oven with direct steam: 90% steam saturation.  
Cooking cycles: hot air (max 280 °C) combined with 11 different humidity settings, ranging from browning to baking and par-steaming. Programmability: 99 free recipes with 9-step cooking. Variable fan speed with 3 levels. Double-glass door with book-like opening maintains a cool external temperature and incorporates a drip pan to collect excess condensation avoiding wet floors. Halogen lighting in the cooking chamber. Door, front panel and interior in AISI 304 stainless steel. Supplied with n.1 tray rack 1/1GN, 30mm pitch.

## Main Features

- Dry hot convection cycle (max 280 °C) ideal for low humidity cooking. Automatic moistener (11 settings) for boiler-less steam generation:
  - 0 = no additional moisture (browning, au gratin, baking, pre-cooked food)
  - 1-2 = low moisture (small portions of meat and fish)
  - 3-4 = medium low moisture (large pieces of meat, reheating, roasted chicken and proving)
  - 5-6 = medium moisture (roasted vegetable and first step of roasted meat & fish)
  - 7-8 = medium-high moisture (stewed vegetables)
  - 9-10 = high moisture (poached meat and jacket potatoes)
- Programmability: a maximum of 99 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. 9-step cooking programs also available.
- Eco-delta: the temperature inside the cooking cell is higher than the temperature of the food and rises accordingly.
- Automatic cleaning system: 3 different pre-set cycles to clean the cooking cell, according to the actual requirements. The cleaning system is built-in (no need for add-ons).
- Automatic and manual rapid cooling activation when going from a higher to a lower temperature.
- Exhaust valve electronically controlled to extract humidity in excess for extra crispy results.
- USB connection: to download HACCP data, upload/download the recipes.
- IPX4 water resistance certification.
- Variable fan speed with 3 levels.

## Construction


- Seamless hygienic internal chamber with all rounded corners for easy cleaning.
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Swing hinged front panel for easy service access to main components.

APPROVAL: \_\_\_\_\_


**Optional Accessories**

- Pair of AISI 304 stainless steel grids, GN 1/1 PNC 922017
- Grid for whole chicken (4 per grid - 1,2kg each), GN 1/2 PNC 922086
- Pair of frying baskets PNC 922239
- Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1 PNC 922266
- Base support for stacked compact ovens PNC 922368
- Open base for compact 6x1/1GN oven PNC 922369
- Tray support for compact 6x1/1GN oven - open base PNC 922370
- Stacking kit for compact 6x1/1GN oven PNC 922371
- External spray unit for compact 6x1/1GN oven PNC 922372
- 1-sensor core probe for compact 6x1/1GN oven PNC 922373
- Right-hinged door for compact 6x1/1GN oven (only for 240008) PNC 922376
- Double-step door for opening compact 6x1/1GN oven PNC 922377
- Kit to front air filter for compact 6x1/1GN oven PNC 922379
- Non-stick universal pan, GN 1/1, H=20mm PNC 925000
- Non-stick universal pan, GN 1/1, H=40mm PNC 925001
- Non-stick universal pan, GN 1/1, H=60mm PNC 925002
- Double-face griddle, one side ribbed and one side smooth, GN 1/1 PNC 925003
- Aluminum grill, GN 1/1 PNC 925004
- Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1 PNC 925005
- Flat baking tray with 2 edges, GN 1/1 PNC 925006
- Baking tray for 4 baguettes, GN 1/1 PNC 925007
- Non-stick universal pan, GN 1/2, H=20mm PNC 925009
- Non-stick universal pan, GN 1/2, H=40mm PNC 925010
- Non-stick universal pan, GN 1/2, H=60mm PNC 925011

**Front**

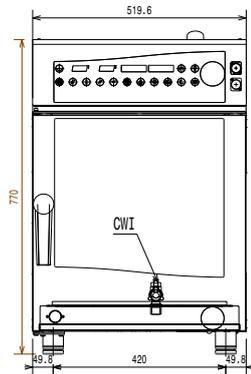


**Side**

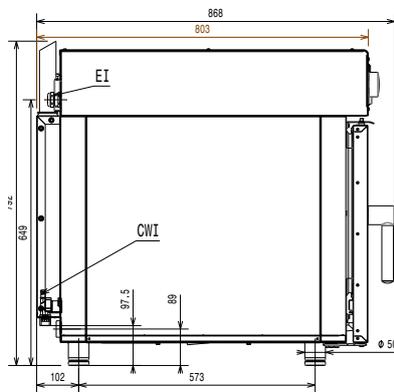

**D** = Drain  
**EI** = Electrical inlet (power)

**Top**

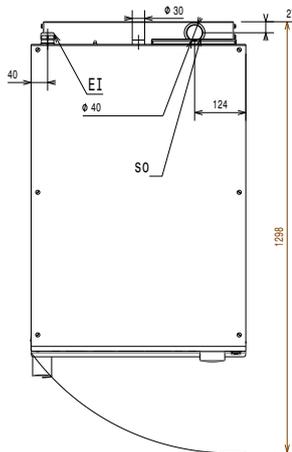

**Electric**

**Supply voltage:**

|                   |                          |
|-------------------|--------------------------|
| 240008 (ZCD061WL) | 380-415 V/3N ph/50/60 Hz |
| 240010 (ZCD061WD) | 380-415 V/3N ph/50/60 Hz |

**Electrical power max.:**

6.9 kW

**Circuit breaker required**

**Water:**

**Water inlet "CW" connection:**

**Total hardness:** 5-50 ppm

**Pressure, bar min/max:**

|                   |             |
|-------------------|-------------|
| 240008 (ZCD061WL) | 1.5-4.5 bar |
| 240010 (ZCD061WD) | 3-6 bar     |

**Drain "D":**

|                   |      |
|-------------------|------|
| 240008 (ZCD061WL) | 40mm |
|-------------------|------|

**Electrolux** recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality information.

**Installation:**

**Clearance:** 5 cm rear and right hand sides.

**Suggested clearance for service access:**

50 cm left hand side.

**Capacity:**

**Trays type:** 6 - 1/1 Gastronorm

**Max load capacity:** 12 kg

**Key Information:**

**External dimensions, Width:** 519 mm

**External dimensions, Height:** 770 mm

**External dimensions, Depth:** 803 mm

**Net weight:**

|                   |       |
|-------------------|-------|
| 240008 (ZCD061WL) | 72 kg |
| 240010 (ZCD061WD) | 85 kg |

**Shipping weight:**

|                   |       |
|-------------------|-------|
| 240008 (ZCD061WL) | 85 kg |
| 240010 (ZCD061WD) | 92 kg |

**Shipping volume:** 0.66 m<sup>3</sup>